
Diablo Mini X2 Studio Monitor Loudspeaker

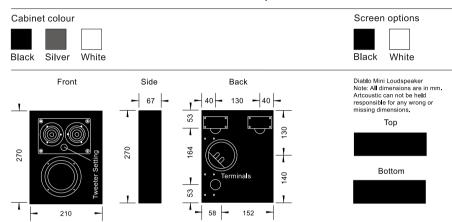

Diablo Mini X2

2-way Studio Monitor. 1 x 4 inch LF-MF unit, 2 x 1.5 inch 90 degree X2 HF unit. The Diablo Mini is shipped in a grey coloured Artcoustic shoulder bag together with two pair of screens - one black and one white. No other screen options are available.

Operating Range: 80 Hz to 40 KHz

Beamwidth HF: 90 degree X2

FR: SPL 1 Watt 93dB Max SPL 105 dB avg 4 ohm continuous power handling 110 W

LF: Max SPL 105 dB avg 4 ohm continuous power handling 110 W
HF: Max SPL Switch setting (0) 106 dB, setting (1) 114 dB avg 4 ohm

continuous power handling 100 W

Connections: Gold plated screw terminals, single amp

Dimensions: 270 H x 210 W x 67 D mm

Weight: 3.5 kg each

Diablo Mini X2

The Diablo Mini X2 is an extremely versatile and accurate monitor speaker. Its compact size makes it easy to accommodate in the most space-restricted environments, while its performance and sheer power belie the size of the enclosure. Featuring two X2 rippled dome tweeters that produce a more consistent, uniform high frequency performance, the Mini X2 is capable of an extended frequency response of up to 40kHz at 96dB (1w +/-2dB) and extremely high sound pressure levels, even from low-powered (20W+) amplifiers.

The Mini is ideally suited to home cinema use in a small to medium sized room, or for near-field studio monitoring applications. It will also do a great job in commercial environments such as bars, restaurants and corporate presentation facilities. The Mini features one 4" woofer and can also be used in conjunction with an Artcoustic subwoofer for even better low-frequency performance.

Applications	
2-channel stereo / near field studio monitoring max. SPL 1m 105dB max. SPL 4m 97dB	Suitable
Home Cinema, small - medium room max. SPL 1m 105dB max SPL 4m 97dB	Suitable
Restaurant - Bar - fixed installation - boardroom, auditorium max. SPL 1m 105dB max SPL 4m 97dB	Suitable

